Fuel wood - Flow

General description

<fort 14px/inherit;;inherit;Not all forests can be managed equally: accessibility (infrastructure) and technical feasibility (due to topography) play a crucial role in sustainable forest management. Hence, this indicator reflects the timber removals for fuel wood production considering both the forest accessibility (based on the OSM layer) and topographical site condition (slope angle from DEM). Data for timber removals are taken from national forestry inventories. **Flowchart below** describes in detail the calculation procedure to derive the amount of fuelwood (m³/ha/year) produced per local administrative units (LAU2) of the Alpine Space.</for>

The procedure consists of two main parts:

Calculation of the accessible forest areas (Step 1 and 2): typically, commercial wood production occurs only on forests that are accessible and workable in terms of topographic conditions. Hence, in the following analysis only accessible and workable forest areas are included.* <font
14px/inherit;;inherit; Calculation of the amount of fuelwood produced in each
LAU2 (Step 3 and 4): The statistical data about the amount of felling is disaggregated at LAU2 level using results from part 1.

Input data

GIS-Data

Forest roads: open street map layer (OSM)

Source: http://download.geofabrik.de/. The roads classified as "bridleway", "service", "track", "track_grade1", "track_grade2", "track_grade3", "track_grade4", "track_grade5", "unclassified" and "unknown" are used.

Forest: High-resolution tree-cover-density layer

Source: http://land.copernicus.eu/. Pixels with a density between 30-100% are used; forest in agricultural and urban areas is removed.

• Digital Elevation Model: Elevation raster dataset

Source: http://land.copernicus.eu,v1.0

• LAU2 layer: Boundaries of the local administrative units

Source: http://www.eurogeographics.org/products-and-services/euroboundarymap; version 10.

• **Region layer:**Boundaries of the areas for which the statistical data is available. Statistical data about the amount of felled wood is typically not available at LAU level; hence, for every country we used the finest available resource. Because

these datasets have different resolutions and names, we call them "region layers" in the following description. The original names/resolutions for the different countries are the following:

-Germany: Growing regions

Source: https://gdi.thuenen.de/wo/wgwb/

-Switzerland: Production regions*

-France: Nuts 2

Source: http://www.eurogeographics.org/products-and-services/euroboundarymap

-Italy: Nuts 2

Source: http://www.eurogeographics.org/products-and-services/euroboundarymap

-Liechtenstein: Nuts 2

Source: http://www.eurogeographics.org/products-and-services/euroboundarymap

-Austria: "Bezirke"

Source: http://data.opendataportal.at/dataset/geojson-daten-osterreich

-Slovenia: Forest regions (dataset provided by the Slovenian Forest Institute)

Statistical data<font

14px/inherit;;inherit;;inherit>:

 Statistical data about roundwood production: The amount of wood that is extracted from the forest.

Source: Forest inventories of single countries

Percentage of roundwood transformed into fuelwood

Source:

http://ec.europa.eu/eurostat/statistics-explained/index.php/Wood products - production and trade

Variables:


Maximum access distance = 200m (after Clouet, N. and Berger, F., 2009)

Calculation processes


- (1) Calculation of the slope angle of accessible forest: Forested areas within the maximum access distance from forest roads are extracted from the original forest layer and their slope is calculated (in %) The 200m serve as a threshold, all pixels that are further away from the street are not considered in the following calculation.
- (2) Calculation of access distance: Based on Clouet & Berger (2009), the maximum distance from

http://www.wikialps.eu/ Printed on 2025/07/12 09:01

Dividing the statistical data by the accessible forest area in each region/13:00:01 an average value of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible forest for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the produced round wood per accessible for each religible of the per accessibl Which Using the representative and support the second property of the support of EAKBIATER PRETISES RECEIPTED TO SEPTIMENTAL TO THE TOPOGRAPHIC CONTRIBUTIONS, IS therefore, all pixels that are further away from the road than their access distance are removed. **(4) Calculation of fuelwood production:** With statistical data about the share of roundwood that is ten present interference in the language in the language in the language of the language in th roundwood is disaggregated to LAU2 level via the share of accessible forest in every LAU2.

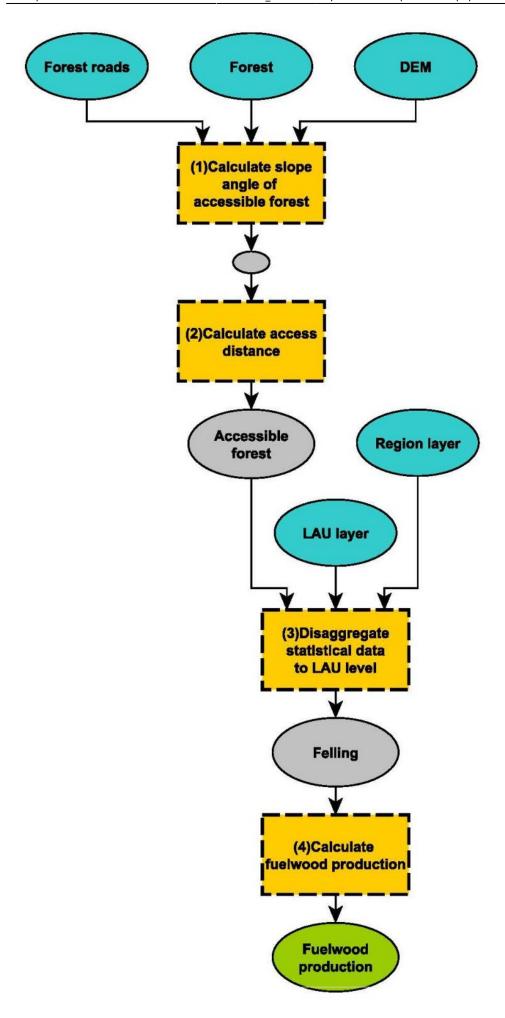

http://www.wikialps.eu/ Printed on 2025/07/12 09:01



Input data → elements that hold a value or a reference to data stored on disk. It is usually a spatial explicit information coming from official sources.

Calculation process→ the actual operation performed on the data. The number preceding the item refers to the number in the model description.

Intermediate data → for each calculation process intermediate data is generated. This data, however, is usually not significant itself, but is used as an input for the next calculation step.

Intermediate output→ is intermediate data that has a significance for the ES evaluation.

Output→ is the result of the calculation process. It is typically one of the ES indicators, either Supply, Demand or Flow.

References:

<u>Clouet, N.; Berger, F. (2009): Modélisation des surfaces</u> débardables au tracteur forestier en zone de montagne. SIG 2009. Confeérence Francophone <u>ESRI</u>

From:

http://www.wikialps.eu/ - WIKIAlps - the Alpine WIKI

Permanent link:

http://www.wikialps.eu/doku.php?id=wiki:wood removals&rev=1531841092



